




## 2-stage water-cooled medium pressure

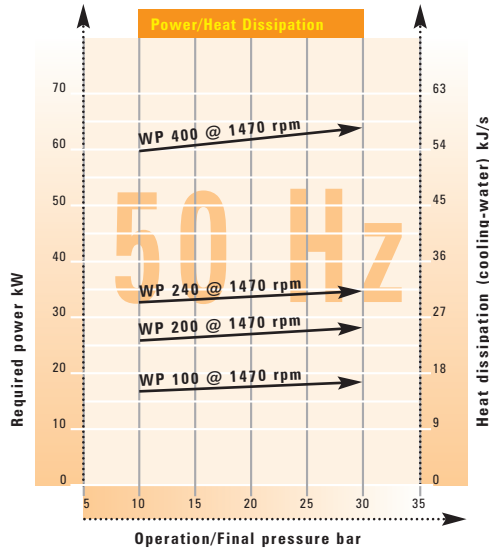

up to 30 bar  
WP 200

Weight (kg) and Dimensions (mm)				
	WP 100	WP 200	WP 240	WP 400
kg	500	800	850	1350
L	1340	1495	1535	1810
B	700	1025	1025	1165
H	850	885	885	1090

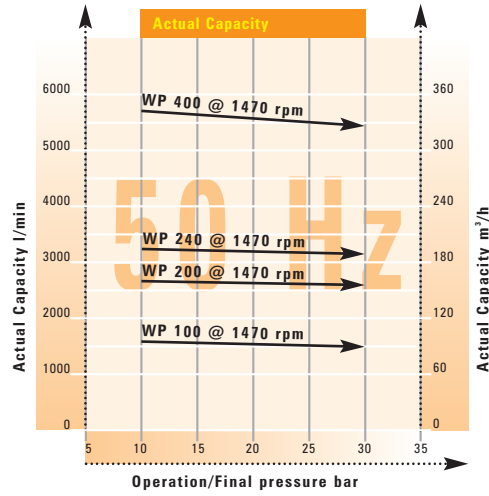

All technical data is valid for the compression of air in accordance with ISO 1217.

All Sauer compressors can additionally be supplied as special versions for the compression of neutral gases such as helium, nitrogen, argon or explosive gases such as hydrogen or natural gas.

Design Data				
Ambient temperature max.: 60°C				
Duty cycle time: continuous				
	WP 100	WP 200	WP 240	WP 400
Max. operation pressure (bar)	30	30	30	30
Max. speed (rpm)	1800	1800	1800	1800
Stages	2	2	2	2
Cylinder	2	2	2	3

