



Air Ejector Mufflers

Male – 1/8"-1"

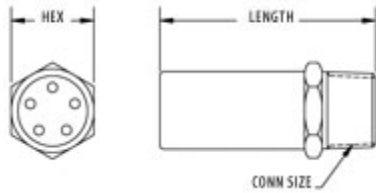

Female – 1/8"- 1/2"

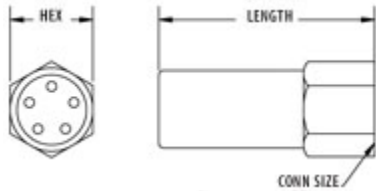

Featuring collimator inserts for concentrated air flow

- Quickly and easily connected to any compressed air source
- Concentrates the air stream in a narrow beam over a longer distance, delivering maximum force at a required point
- Supplied as a complete unit with a cylindrical housing which can be directly attached to compressed air lines properly positioned for parts ejection or packaging requirements
- Can be supplied with a standard plastic collimator insert or a special heat-resistant metal collimator insert (for use in locations with extremely high ambient temperatures)
- Separate collimator inserts also are available as a low-cost solution for applications where it is necessary to bore holes directly into a die and insert the collimator to provide exact air thrust
- Recommended for pressures up to 125 psi (8.6 Bar)

Male-Standard Construction					
Conn Size	Model Type	Male NPT	Male BSPT	Dimensions	
		Item Number	Item Number	Hex	Length
1/8	A18	0152018	0552018	.43	1.37
1/4	A28	0152028	0552028	.56	1.75
3/8	A38	0152038	0552038	.69	2.20
1/2	A48	0152048	0552048	.87	2.75
3/4	A68	0152068	0552068	1.06	3.15
1	A88	0152088	0552088	1.31	3.87

Female-Standard Construction				
Conn Size	Model Type	Female NPS	Dimensions	
		Item Number	Hex	Length
1/8	A18	0252018	.43	1.37
1/4	A28	0252028	.56	1.75
3/8	A38	0252038	.69	2.20
1/2	A48	0252048	.87	2.75