



GSZ Series

Utilizing 4 pole, 1800 rpm motors and 6 pole, 1200 rpm motors the GSZ Series offers longer wear life on parts due to the slower impeller tip speed. GSZ pumps are the most formidable high volume slurry/dewatering pumps offered today.



GSZ Series Features

Discharge sizes from 6-10 inches and horsepower ranges from 30-100 hp.

4 pole, 1800 rpm motors or 6 pole, 1200 rpm motors.

Seal Pressure relief ports on 4 pole, 1800 rpm models.

Lower impeller tip speeds extend parts wear life 2-3 times.


Rugged cast iron construction.

Dual silicon carbide mechanical seals.

Internal Thermal motor protection and Tsurumi's exclusive oil lifter.

Anti wicking cable entrance.

Performance Range

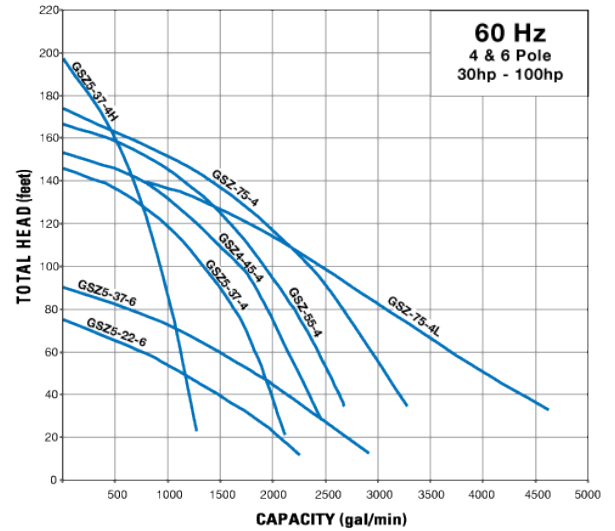

Model	Discharge Size (in.)	Motor Output (HP)	Pole	Voltage (V)	Diameter (in.)	Height (in.)	Weight (lbs.)
GSZ-45-4	8	60	4-1800	460/575	36	59 13/16	2420
GSZ-55-4	10	75	4-1800	460/575	41 5/16	68 5/16	2530
GSZ-75-4L	10	100	4-1800	460/575	41 5/16	68 5/16	2640
GSZ2-22-6	8	30	6-1200	208/230/460/575	38	51 3/8	1540
GSZ2-37-4H	6	50	4-1800	208/230/460/575	35 7/16	56 11/16	1870
GSZ2-37-4H	8	50	4-1800	208/230/460/575	36	57 7/8	1870
GSZ2-37-6	8	50	6-1200	208/230/460/575	39 15/16	52 15/16	2200