



KTZ Series


KTZ pumps are designed to withstand the most demanding conditions, including those found in the highly abrasive waters of construction, aggregate, and mining dewatering. Versatility is increased as each pump model has the capability of easily converting between high head and high volume performance with a simple change of the impeller and wear plate.



KTZ Series Features

- Discharge sizes from 2-6 inches and horsepower range from 2-15 hp.
- Utilizes 2-pole, 3600 rpm motors to achieve higher heads.
- High pressure rated mechanical seals are isolated to provide superior motor protection.
- Rugged cast iron construction.
- Pressure relief ports and exclusive oil lifter extend mechanical seal life, eliminating premature wear and failure in high head operations.
- Internal thermal motor protection.
- Anti-wicking cable entrance.

Performance Range

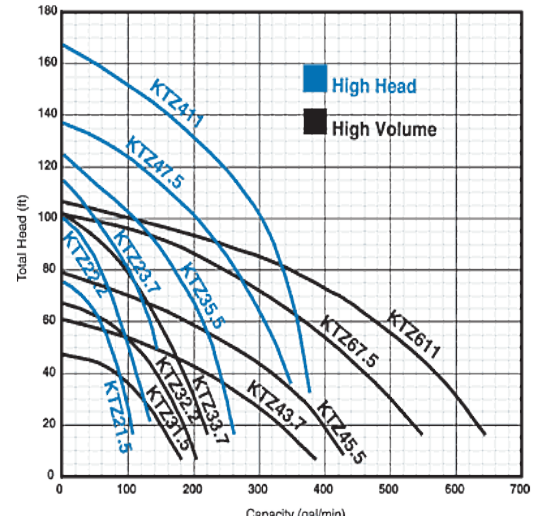

Model	Discharge Bore (in.)	Motor Output (HP)	Shipping Weight (lbs.)	Cable Length (ft.)	Diameter (in.)	Height (in.)
KTZ21.5-60	2	2	64	50	9 1/4	21 9/16
KTZ22.2-60	2	3	70	50	9 1/4	22 3/8
KTZ23.7-60	2	5	121	50	11 1/8	24 5/8
KTZ32.2-60	3	3	70	50	9 1/4	22 3/8
KTZ33.7-60	3	5	121	50	11 1/8	24 5/8
KTZ35.5-60	3	7.5	145	50	12 1/16	25 11/16
KTZ41-60	4	15	286	50	14 11/16	28 11/16
KTZ43.7-60	4	5	121	50	11 1/8	24 5/8
KTZ45.5-60	4	7.5	145	50	12 1/16	25 11/16
KTZ47.5-60	4	10	205	50	13	26
KTZ61-60	4/6	15	286	50	14 11/16	28 11/16
KTZ67.5-60	4/6	10	205	50	13	26