



## LHW Series

Tsurumi's LHW series achieves extremely high head capabilities. Our dual staged enclosed impellers are just one of many features found engineered into these durable pumps which can help you solve all your long distance water transfer needs.



### LHW Series Features

Discharge sizes from 2-4 inches and horsepower range from 4-40 hp

Replaceable and adjustable high chrome wear rings provide increased wear resistance.


Built in thermal and amperage protectors prevent motor failure in run-dry or surge conditions.

High pressure dual silicon carbide mechanical seals operate in a separate oil chamber and are capable of withstanding operating depths of 328 feet.

Seal pressure relief ports provide a flow path above the pump casing and allow water release from the pump and away from the shaft. This protects the mechanical seals from excessive pumping pressure or water hammer in high head pumping applications.

Anti-wicking cable entrance and Tsurumi's exclusive oil lifter for added protection.

## Performance Range

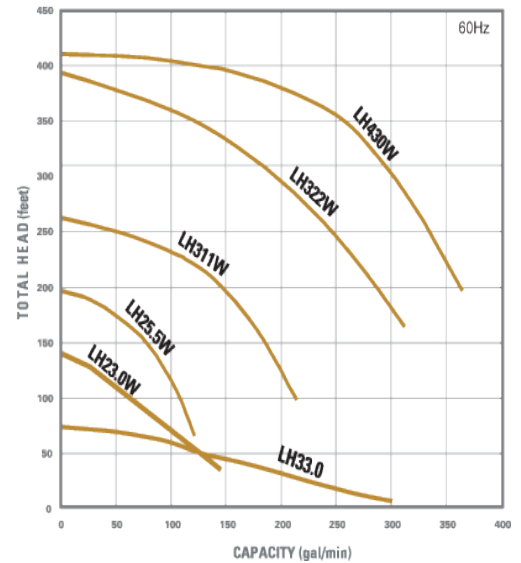

Model	Discharge Bore (in.)	Motor Output (HP)	Shipping Weight (lbs.)	Cable Length (ft.)	Voltage (V)	Weight (lbs.)	Diameter (in.)	Height (in.)
LH23.0W	2	4	Consult Factory	50	208-230/460/575	101	7-5/16	24-13/16
LH311W	3	15	N/A	50	208/230/460/575	286	10-5/8	40-5/16
LH322W	3	30	N/A	50	208/230/460/575	670	13	48-5/8
LH33.0	3	4	Consult Factory	50	208-230/460/575	93	7-5/16	25-3/8
LH430W	4	40	N/A	50	208/230/460/575	714	14-3/8	54-1/8