



MG Series

Foreign matter is finely ground up by the built-in grinder mechanism and discharged by a vortex impeller.

Tsurumi submersible grinder pumps utilize a grinding mechanism in the suction port to crush foreign matter into fine particles before discharging the waste.




MG Series Features

Semi-vortex high chrome impeller

High chromium grinder mechanism

Ideal for small scale sewage systems

Performance Range

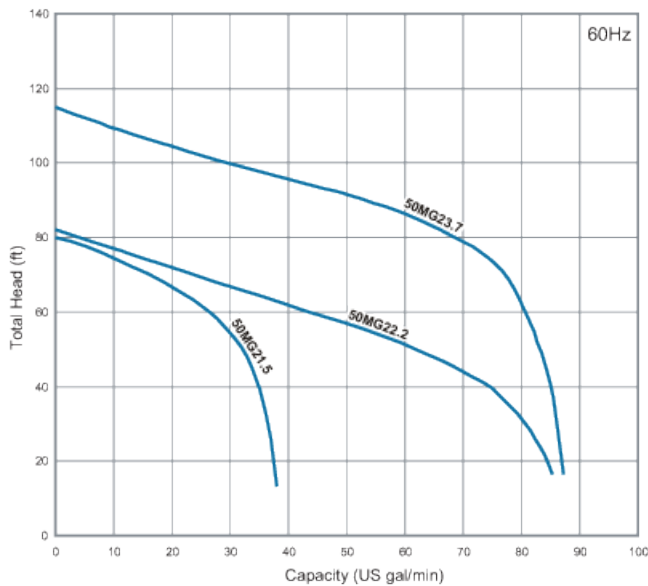

Model	Discharge Size (in.)	Phase	Motor Output (HP)	Voltage (V)	Diameter (in.)	Height (in.)	Weight - Freestanding (lbs.)	Weight - TOS Model (lbs.)
50MG21.5	2	Three	2	230/460/575	14 3/16	21 15/16	79	79
50MG22.2	2	Three	3	230/460/575	17 1/4	23 3/8	170	161
50MG23.7	2	Three	5	230/460/575	17 1/4	23 3/8	172	16