




SFQ Series

Tsurumi corrosion resistant pumps are available in 316 or 304 stainless steel (SFQ Series, SQ Series) as well as titanium (TM Series). Featuring semi-vortex, vortex, and semi-open impellers, our solidly engineered pumps can endure the corrosive forces of your toughest applications.

Performance Range

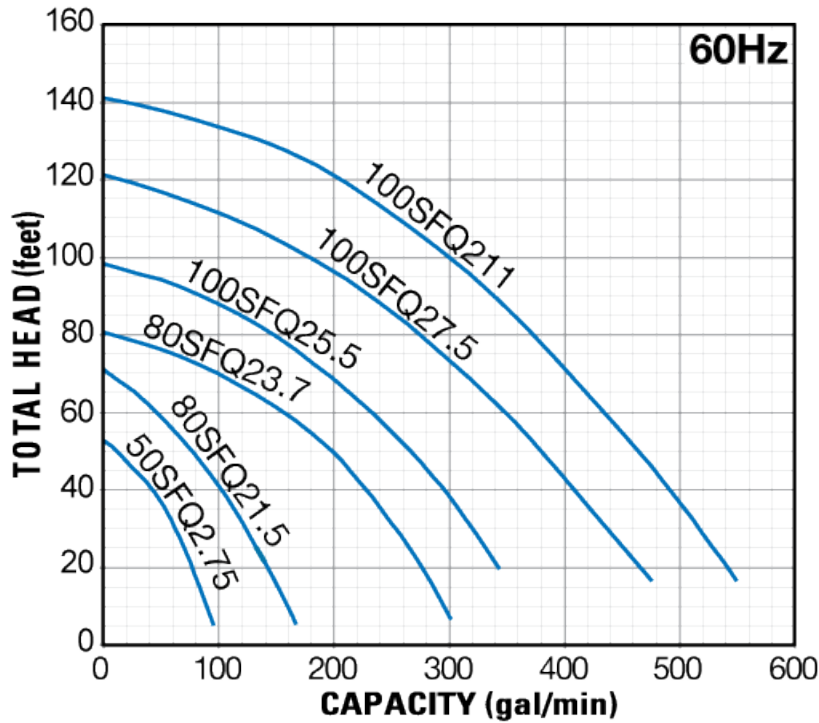

Model	Discharge Bore (in.)	Phase	Motor Output (HP)	Pole	Voltage (V)	Diameter (in.)	Height (in.)	Weight (lbs.)
100SFQ211	4	Three	15	2-3600	440	25	33 1/4	315
100SFQ25.5	4	Three	7.5	2-3600	440	25	33 1/4	273
100SFQ27.5	4	Three	10	2-3600	440	23 3/8	31 3/8	271
50SFQ2.75	2	Three	1	2-3600	440	9 15/16	15 5/8	49
80SFQ21.5	3	Three	2	2-3600	208/230/460/575	12 15/16	17 1/8	
80SFQ23.7	3	Three	5	2-3600	208/230/460/575	14 1/8	21 3/4	