



SQ Series

Tsurumi corrosion resistant pumps are available in 316 or 304 stainless steel (SFQ Series and SQ Series) as well as titanium (TM Series). Featuring semi-vortex, vortex, and semi-open impellers, our solidly engineered pumps can endure the corrosive forces of your toughest applications.




SQ Series Features

304 Stainless Steel construction

2-inch discharge size, available in 1/2 - 1 HP

CTP built in motor protector prevents pump failure in overheating / run-dry situations.

Performance Range

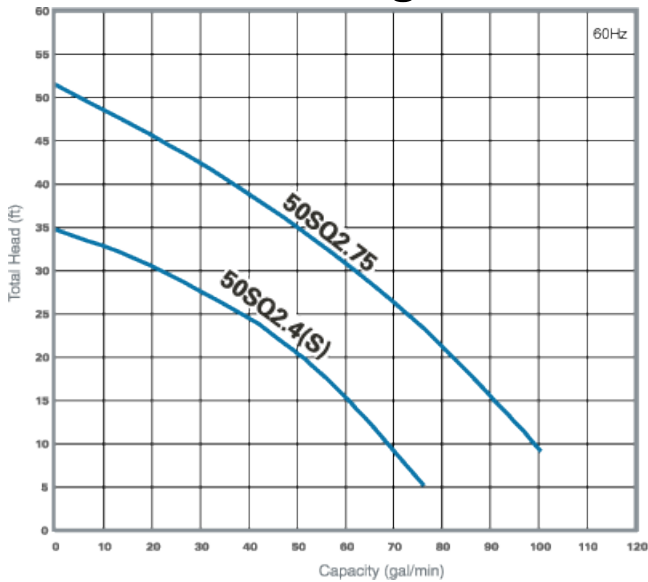

Model	Discharge Bore (in.)	Phase	Motor Output (HP)	Pole	Voltage (V)	Shipping Weight (lbs.)	Diameter (in.)	Height (in.)
50SQ2.4	2	Three	1/2	2-3600	208/230/460/575	26	7 3/16	15 7/8
50SQ2.4s	2	Single	1/2	2-3600	115/230	29	7 3/16	16 5/8
50SQ2.75	2	Three	1	2-3600	208/230/460/575	32	7 9/16	17 7/16