




TM Series

Tsurumi corrosion resistant pumps are available in 316 or 304 stainless steel (SFQ Series and SQ Series) as well as titanium (TM Series). Featuring semi-vortex, vortex, and semi-open impellers, our solidly engineered pumps can endure the corrosive forces of your toughest applications.

Performance Range

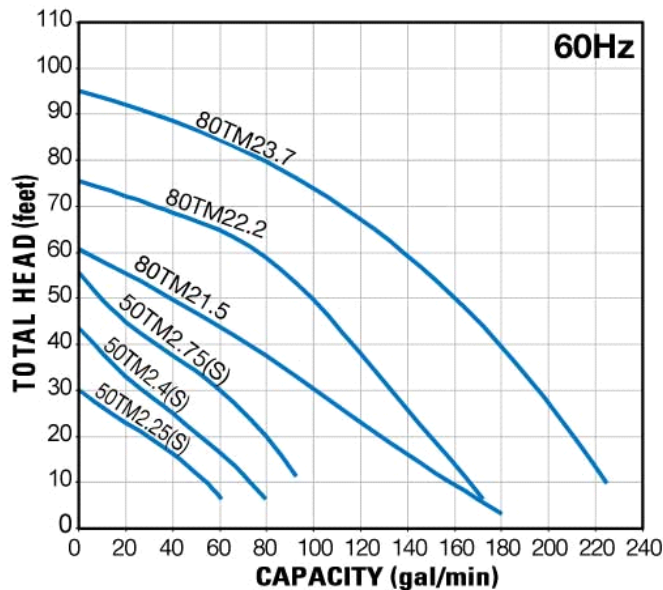

Series	Model	Discharge Bore (in.)	Phase	Motor Output (HP)	Voltage (V)	Shipping Weight (lbs.)	Diameter (in.)	Height (in.)
TM	50TM2.25	2	Three	1/3	230/460	15	9 5/8	14 15/16
TM	50TM2.25S	2	Single	1/3	115/230	16	9 5/8	14 15/16
TM	50TM2.4	2	Three	1/2	230/460	16	9 5/8	15 1/4
TM	50TM2.4S	2	Single	1/2	115/230	17	9 5/8	15 1/4
TM	50TM2.75(S)	2	Single	1	115/230	20	9 5/8	15 7/8
TM	80TM21.5	3	Three	2	208-220/440	33	7 11/16	17 1/8
TM	80TM22.2	3	Three	3	208-220/460/575	46	8 3/8	22
TM	80TM23.7	3	Three	5	208-220/460/575	57	8 3/8	23 3/8
TMA	50TMA2.25	2	Three	1/3	230/460	16	9 5/8	14 15/16
TMA	50TMA2.25S	2	Single	1/3	115/230	17	9 5/8	14 15/16
TMA	50TMA2.4	2	Three	1/2	230/460	17	9 5/8	15 1/4
TMA	50TMA2.4S	2	Single	1/2	115/230	19	9 5/8	15 1/4
TMA	50TMA2.75(S)	2	Single	1	115/230	21	9 5/8	15 7/8
TMA	80TMA21.5	3	Three	2	208-220/440	34	7 11/16	24 1/2
TMA	80TMA22.2	3	Three	3	208-220/460/575	48	8 3/8	30 1/4
TMA	80TMA23.7	3	Three	5	208-220/460/575	59	8 3/8	31 1/2