



U Series

Tsurumi's U-Series pumps provide exceptional capabilities for those small to mid-range applications in which solids and stringy materials can be problematic.



U Series Features

Semi-vortex cast iron impellers

Copper wound motor, air-filled and rated for continuous duty


Class F insulation

Circle Thermal Protectors (CTP) provide protection due to excessive heat build up, over current, or electrical/mechanical failure

Cast iron construction

Watertight casing

Performance Range

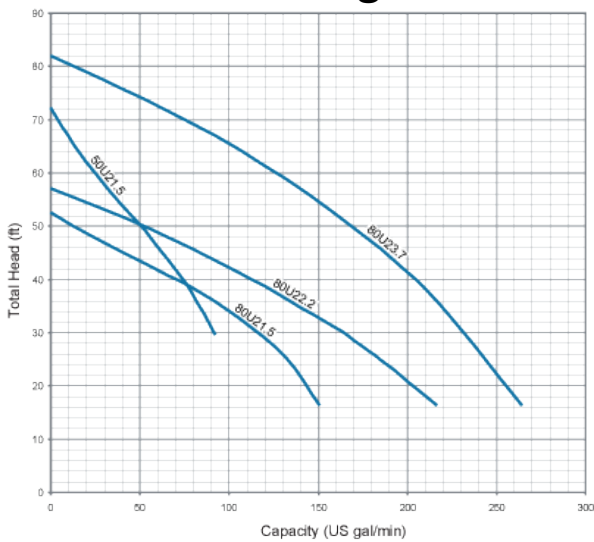

Series	Model	Discharge Size (in.)	Phase	Motor Output (HP)	Voltage (V)	Diameter (in.)	Height (in.)	Weight (lbs.)
U Series	50U21.5	2	Three	2	230/460/575	11 11/16	18 3/8	66(Free)/77(TOS)
U Series	80U21.5	3	Three	2	230/460/575	16 9/16	19 3/4	88(Free)/79(TOS)
U Series	80U22.2	3	Three	3	230/460/575	19 3/4	22 1/8	121(Free)/112(TOS)
U Series	80U23.7	3	Three	5	230/460/575	19 3/4	25 1/4	129(Free)/127(TOS)