






2-stage air-cooled medium pressure

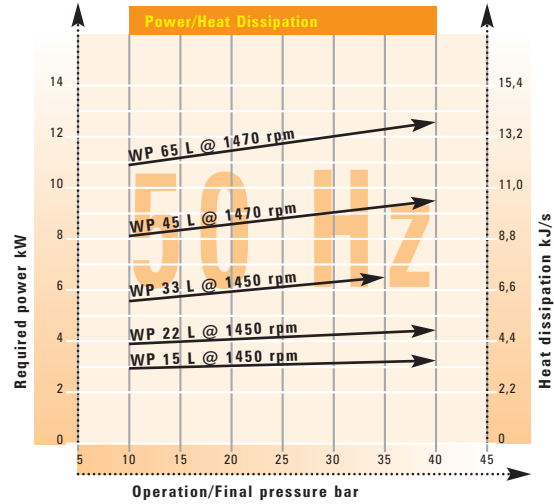

up to 40 bar
WP 45/65 L

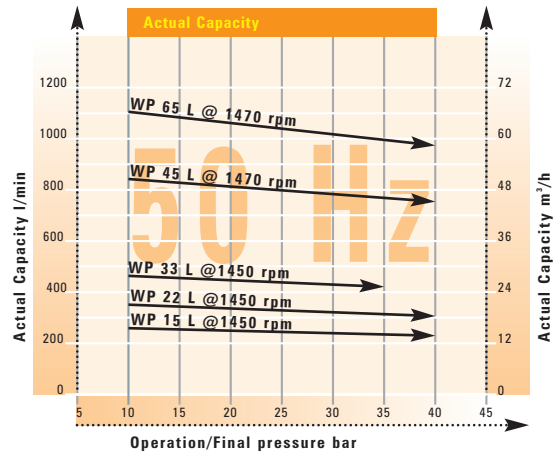

Weight (kg) and Dimensions (mm)					
	WP 15 L	WP 22 L	WP 33 L	WP 45 L	WP 65 L
kg	120	135	185	320	330
L	815	855	890	1210	1250
B	600	600	600	745	745
H	630	630	630	820	820

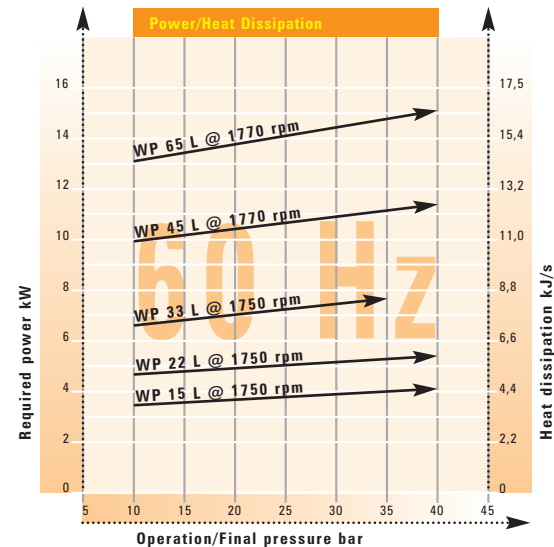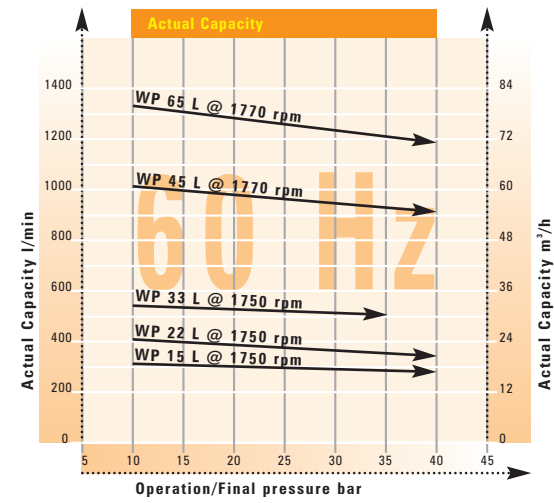

All technical data is valid for the compression of air in accordance with ISO 1217.

All Sauer compressors can additionally be supplied as special versions for the compression of neutral gases such as helium, nitrogen, argon or explosive gases such as hydrogen or natural gas.

Design Data					
Ambient temperature max.: 60°C					
Duty cycle time: continuous					
	WP 15 L	WP 22 L	WP 33 L	WP 45 L	WP 65 L
Max. operation pressure (bar)	40	40	35	40	40
Max. speed (rpm)	2000	2000	2000	2000	2000
Stages	2	2	2	2	2
Cylinder	2	2	2	2	2