




3-stage air-cooled medium pressure

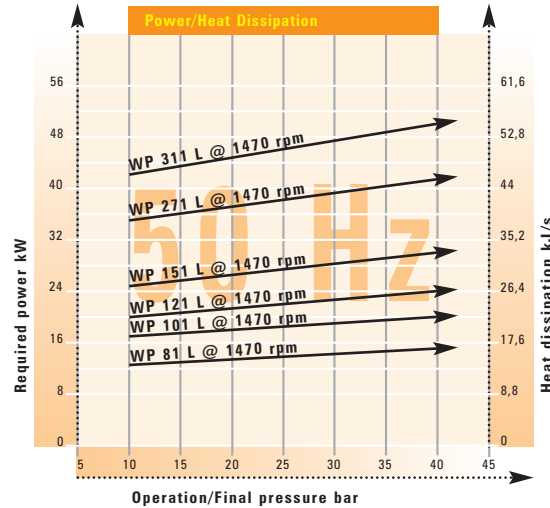

up to 44 bar
WP 121 L

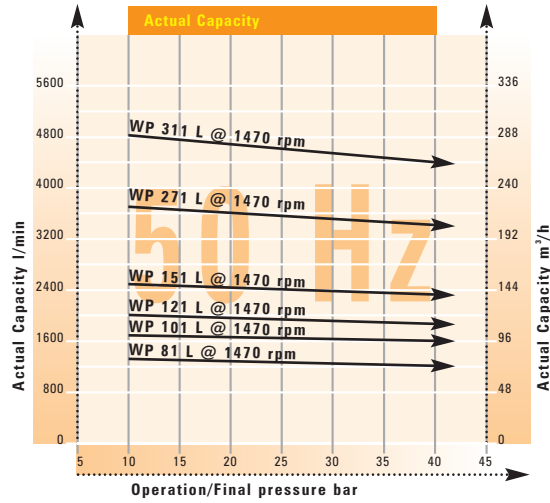

All technical data is valid for the compression of air in accordance with ISO 1217.

All Sauer compressors can additionally be supplied as special versions for the compression of neutral gases such as helium, nitrogen, argon or explosive gases such as hydrogen or natural gas.

Design Data						
Ambient temperature max.: 60°C						
Duty cycle time: continuous						
	WP 81 L	WP 101 L	WP 121 L	WP 151 L	WP 271 L	WP 311 L
Max. operation pressure (bar)	44	44	44	44	44	44
Max. speed (rpm)	2000	2000	2000	2000	2000	2000
Stages	3	3	3	3	3	3
Cylinder	3	3	3	3	4	4

Weight (kg) and Dimensions (mm)						
	WP 81 L	WP 101 L	WP 121 L	WP 151 L	WP 271 L	WP 311 L
kg	415	430	655	700	940	1075
L	1345	1385	1565	1575	1765	1835
B	945	945	960	960	1070	1070
H	900	900	955	955	1100	1100

