

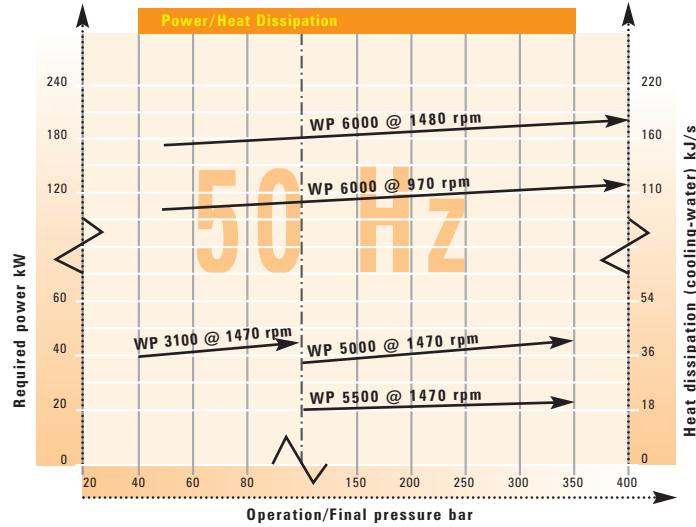


## 4-stage water-cooled high pressure

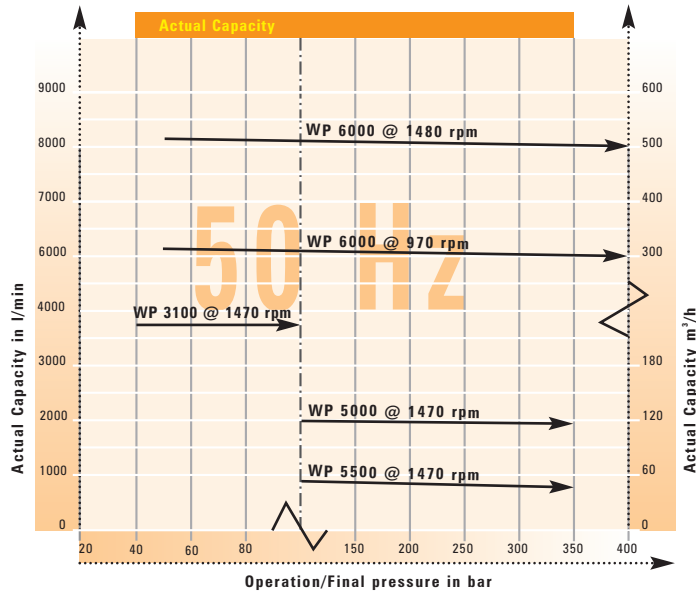

All technical data is valid for the compression of air in accordance with ISO 1217. All Sauer compressors can additionally be supplied as special versions for the compression of neutral gases such as helium, nitrogen, argon or explosive gases such as hydrogen or natural gas.

Design Data				
Ambient temperature max.: 60°C				
Duty cycle time: continuous				
	WP 3100	WP 5000	WP 5500	WP 6000
Max. operation pressure (bar)	100	350	350	420
Max. speed (rpm)	1800	2000	2000	1800
Stages	3	4	4	4
Cylinder	3	4	4	6



up to 350 bar  
WP 5500/5000

Weight (kg) and Dimensions (mm)				
	WP 3100	WP 5000	WP 5500	WP 6000
kg	1350	1650	930	3500
L	1800	1215	970	2800
B	1180	1095	810	1600
H	800	1570	1325	1800

