



## BZ Series

Incorporates a channel impeller developed exclusively for sewage pumps, ensuring the efficient transfer of suspended solids.



### BZ Series Features


Single vane, cast iron impeller

Passes 3" diameter solids without clogging

Class F insulation minimizes operating costs

Built-in motor protection for surge and run-dry conditions

## Performance Range

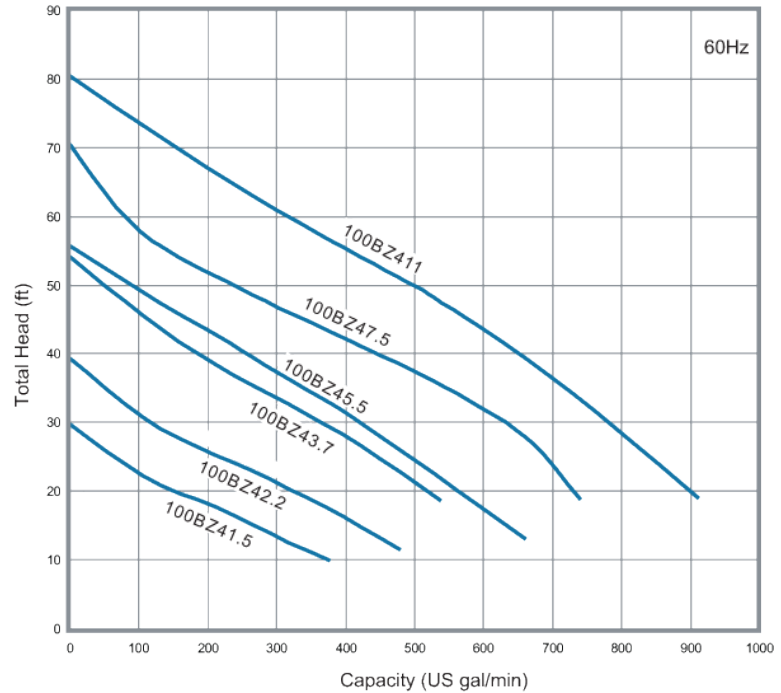

Model	Discharge Size (in.)	Phase	Motor Output (HP)	Voltage (V)	Diameter (in.)	Height (in.)	Weight - Freestanding (lbs.)	Weight - TOS Model (lbs.)
100BZ41.5	4	Three	2	230/460/575	21 11/16	24 13/16	176	163
100BZ411	4	Three	15	230/460/575	28 5/8	40 1/4	483	467
100BZ42.2	4	Three	3	230/460/575	21 11/16	24 13/16	176	163
100BZ43.7	4	Three	5	230/460/575	23	26 13/16	220	207
100BZ45.5	4	Three	7.5	230/460	28 3/16	36 7/16	386	370
100BZ47.5	4	Three	10	230/460/575	28 3/16	40 1/4	428	412