

C200 MicroTurbine Liquid Fuels



Achieve lower emissions and reliable electrical/thermal generation with diesel fuel.

- Ultra-low emissions
- One moving part – minimal maintenance and downtime
- Patented air bearing – no lubricating oil or coolant
- 5 and 9 year Factory Protection Plans available
- Remote monitoring and diagnostic capabilities
- Integrated utility synchronization and protection⁽¹⁾
- Small, modular design allows for easy, low-cost installation and easy transportation
- Proven technology with tens of millions of operating hours



C200 MicroTurbine

Electrical Performance⁽²⁾

Electrical Power Output	200kW
Voltage	400–480 VAC
Electrical Service	3-Phase, 4 wire
Frequency	50/60 Hz, grid connect operation 10–60 Hz, stand alone operation
Maximum Output Current	290A RMS @ 400V, grid connect operation 240A RMS @ 480V, grid connect operation 310A RMS, stand alone operation ⁽³⁾
Electrical Efficiency LHV	33%

Fuel/Engine Characteristics⁽²⁾

Liquid Fuels ⁽⁴⁾	Diesel (ASTM D975-07b Grade Low Sulfur No. 2-D)
Inlet Pressure	-14 to 35 kPa gauge (-2 to +5 psig)
Fuel Flow HHV	2,400 MJ/hr (2,280,000 BTU/hr)
Net Heat Rate LHV	10.9 MJ/kWh (10,300 BTU/kWh)

Exhaust Characteristics⁽²⁾

Exhaust Gas Flow	1.3 kg/s (2.9 lbm/s)
Exhaust Gas Temperature	280°C (535°F)
Exhaust Energy	1,420 MJ/hr (1,350,000 BTU/hr)

Reliable power when and where you need it. Clean and simple.

Dimensions & Weight⁽⁵⁾

Width x Depth x Height ⁽⁶⁾	1.7 x 3.8 x 2.5 m (67 x 150 x 98 in)
Weight – Grid Connect Model	2776 kg (6,120 lb)
Weight – Dual Mode Model	3413 kg (7,525 lb)

Minimum Clearance Requirements⁽⁷⁾



Vertical Clearance	0.6 m (24 in)
Horizontal Clearance	
Left & Right	1.1 m (42 in)
Front	1.1 m (42 in)
Rear	1.8 m (70 in)

Sound Levels

Acoustic Emissions at Full Load Power	
Nominal at 10 m (33 ft)	65 dBA

Planned Certifications

- Models will be available with optional equipment for CE Marking

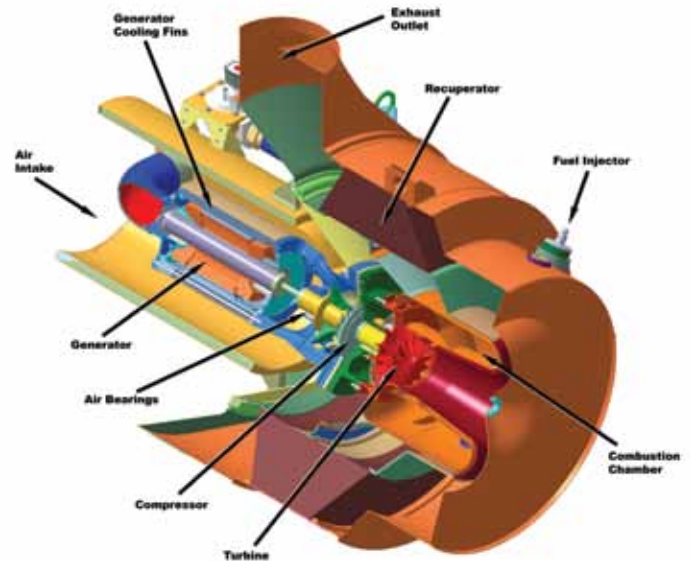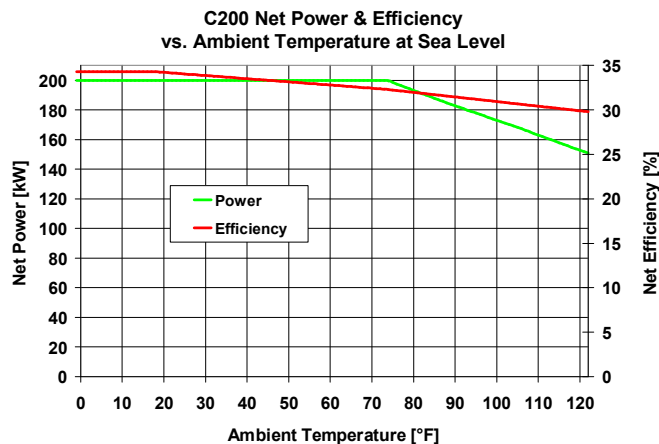

(1) Some utilities may require additional equipment for grid interconnectivity
 (2) Nominal full power performance at ISO conditions: 59°F, 14.696 psia, 60% RH
 (3) With linear load
 (4) Contact Capstone for additional possible fuels
 (5) Approximate dimensions and weights
 (6) Height dimensions are to the roof line. Exhaust outlet extends at least 8 inches above the roof line
 (7) Clearance requirements may increase due to local code considerations
 Specifications are not warranted and are subject to change without notice.

