

# GTP10 and GTP12

## Transfer Pumps and Packages

### Features and Benefits


- Heavy-duty, die-cast aluminum
- CSA listed motor
- Built-in relief valve and filter strainer
- Easy-to-lock security
- High quality, UV resistant automotive finish
- Rain proof for extreme weather conditions
- Two year warranty

### Typical Applications

- Fuel transfer for the construction, agriculture, manufacturing and marine industries

### Typical Fluids Handled

- Gasoline
- Diesel fuel
- Kerosene
- Bio-fuels

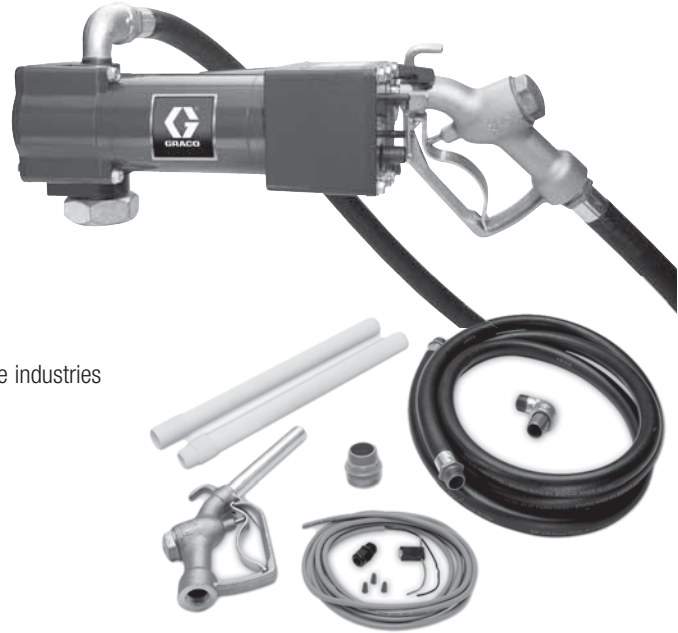

### Ordering Information

Kit Number	260000	260020	260025	260022
Voltage	12 VDC	24 VDC	115 VAC	230 VAC
Inlet Port	1 npt			
Outlet Port	3/4 npt			
Current	12 amps	6 amps	1.7 amps	1 amps
Power Cord	18 ft (5.5 m)		N/A	
Hose	3/4 in x 12 ft (19 mm x 3.7 m)			
Suction Tube	1 in x 34 in (25 mm x 0.9 m)			
Weight	20 lbs (9 kg)			
Max Fluid Flow	10 gpm (38 lpm)		12 gpm (45 lpm)	
Instruction Manual	311304			

**Fuel Transfer Kit:** Includes pump, fuel nozzle, bung adapter, 34 in (0.9 m) suction tube, 12 ft (3.7 m) grounded hose, elbow fitting, 18 ft (5.5 m) power cable, wire nuts and strain relief

*NOTE: AC units do not include power cable, wire nuts or strain relief*

### Accessories

260078	Unleaded nozzle
260083	Unleaded nozzle with auto shut-off
260082	Regular/diesel nozzle with auto shut-off
260079	Regular/diesel nozzle
260523	8 ft x 3/4 in (2.4 m) npt UL Listed hose
260521	12 ft x 3/4 in (3.7 m) npt UL Listed hose



260083