



LB Series

Top discharge provides maximum motor cooling while allowing continuous duty operation.

Available in single-phase or three-phase. Pumps fit into 8-inch pipes.



LB Series Features

LB(T)-1500:

High chrome semi-open impeller resists wear for adhesive particles.

Diode motor protectors prevent stator damage in high amperage or run-dry situations.

Up to 70' shut off head

Slimline design allows pumps to fit into 8" pipes.



LB Series Features

LB-800:

Designed to fit an 8" pipe. Up to 60' shut off head.

Available in 110V and 220V single-phase with 50 foot cables.

Double Inside Mechanical Seal With SiC faces provides the longest operational life.

Oil Lifter provides lubrication of the seal faces.

OPTIONAL ACCESSORIES

Float Switch for automatic operation

TS-302 for 110V, TS-303 for 220V.



LB Series Features

LB-480:

Urethane Semi Vortex Impeller and elastomer lined pump casing for maximum wear life.

OPTIONAL ACCESSORIES

TS-301 Float Switch for automatic operation.



LB Series Features

LB-480A:

Our advanced EL-1 Relay unit mounted on the side of the pump, eliminates the need for float switches. These sensitive electrodes detect water, turning the pump on and off automatically.




LB Series Features

LBT-800:

Three-phase pumps complete with double mechanical SIC seals, oil lifters, and durable lightweight materials found in our similar single-phase products. Available in 230 or 460 voltages.

Performance Range

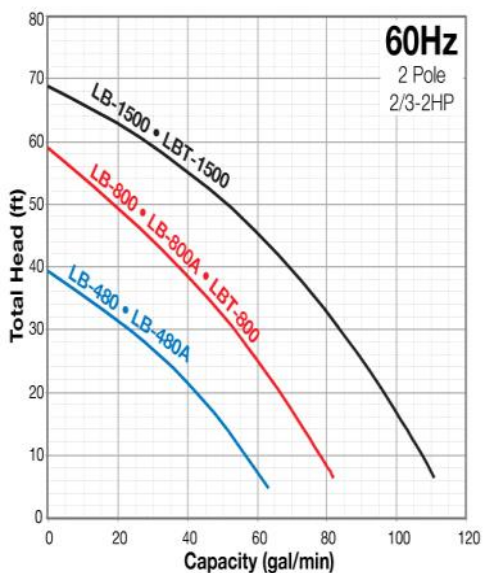

| Model | Discharge Size (in.) | Motor Output (HP) | Voltage (V) | Cable Length (ft.) | Diameter (in.) | Height (in.) | Weight (lbs.) |
|----------|----------------------|-------------------|--------------------|--------------------|----------------|--------------|---------------|
| LB-1500 | 3 | 2 | 110V or 220V | 50 | 7 3/8 | 23 5/16 | 72 |
| LB-480 | 2 | 2/3 | 110V | 32 | 7 3/8 | 11 1/4 | 28 |
| LB-480A | 2 | 2/3 | 110V | 32 | 8 3/4 | 11 1/4 | 30 |
| LB-800 | 2 | 1 | 115V or 230V | 50 | 7 3/8 | 13 7/16 | 35 |
| LB-800A | 2 | 1 | 115 or 230 | 50 | 8 3/4 | 23 5/16 | 38 |
| LBT-1500 | 2 or 3 | 2 | 230 or 460 or 575V | 50 | 7 3/8 | 23 5/16 | 85 |
| LBT-800 | 2 | 1 | 230 or 460 or 575V | 50 | 7 3/8 | 13 7/16 | 35 |